


INSTALLATION:

Install the adapter into the head of the ramp. Press the oval face of the adapter into the oval hole on the ramp. Pass through M8 Bolt and large diameter washer as shown. Tighten bolt.



HOW TO USE:

Undo the two wing nuts and slide the ramp apart until it reaches maximum extension. Tighten the wing nuts until hand tight.

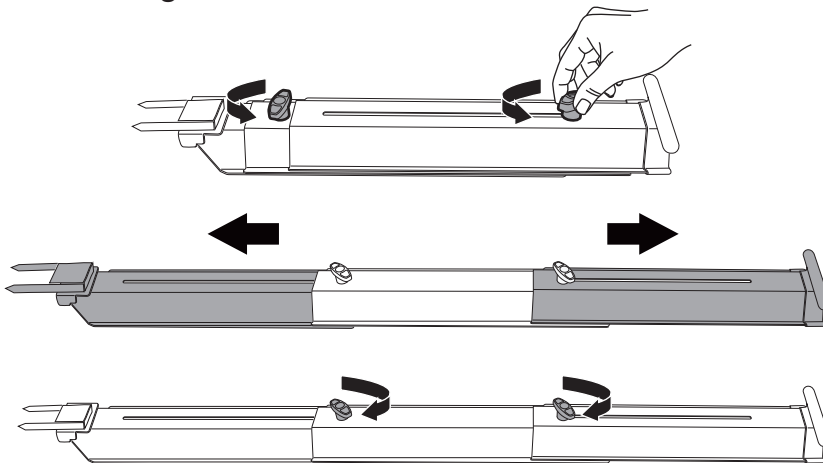


Use one hand to bring the ramp adapter forks in line with the ramp. Keep the forks and ramp level with the bike rack wheel trays and insert the forks into the two pin holes in the bike rack wheel tray. Insert as far as the adapter can go.



Keep the ramp adapter forks and ramp **level** while inserting into the bike rack.



Rotate the ramp down until it makes contact with the ground.

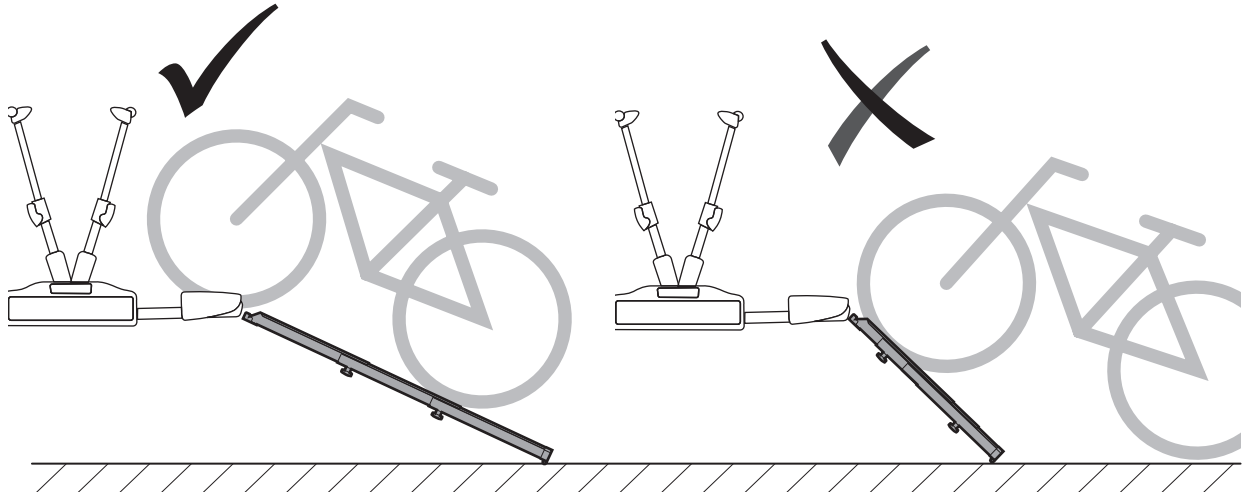

Roll your bike onto the rack.

When removing the ramp, rotate the ramp up until it is level with the bike rack wheel trays then pull the ramp adapter forks free.



Keep the ramp adapter forks and ramp **level** when pulling the ramp free from the bike rack to avoid damaging the forks.