




HOW-TO VIDEOS
AVAILABLE ONLINE





MAX 2 x 30 kg
MAX 2 x 66 lbs

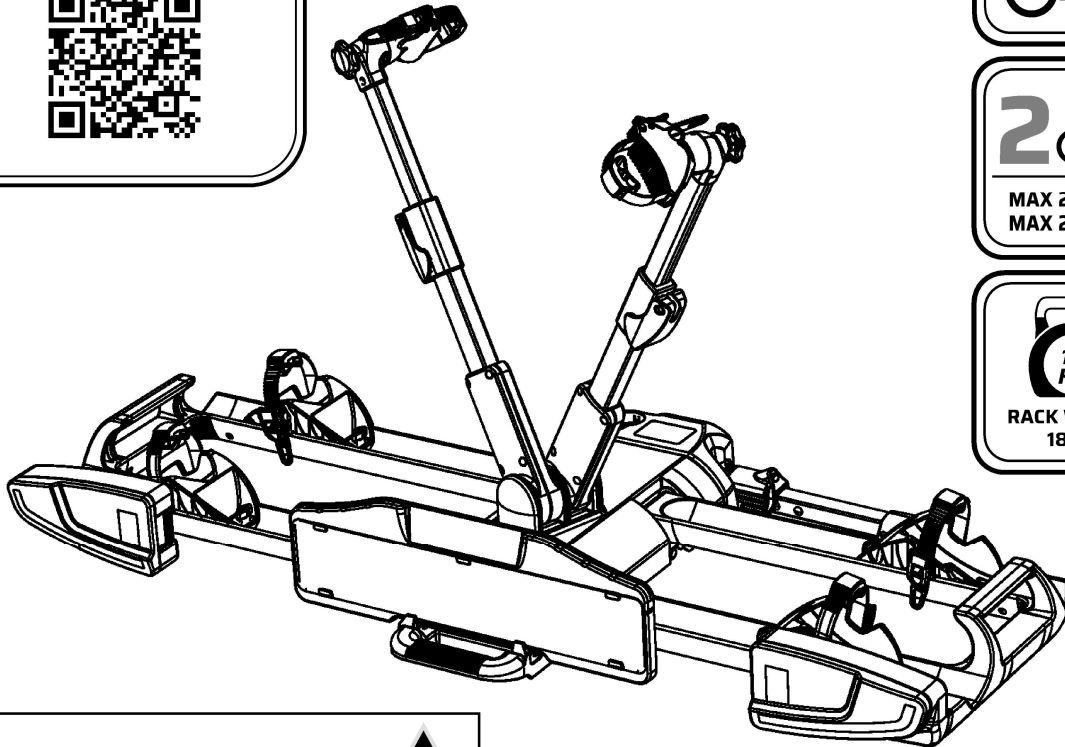


RACK WEIGHS
18 KG

! Compatible with **50 mm** tow balls only **!**


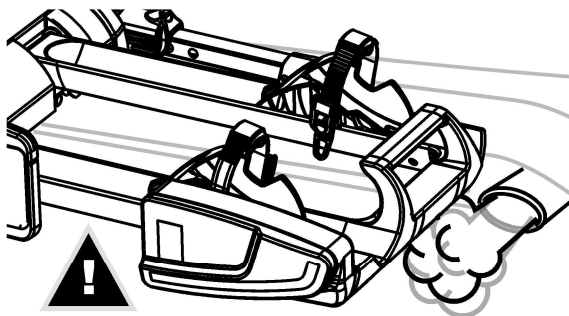


Check the wheel tray of the rack is clear of the vehicle exhaust.

The heat of the exhaust can damage the rack and/or bike.

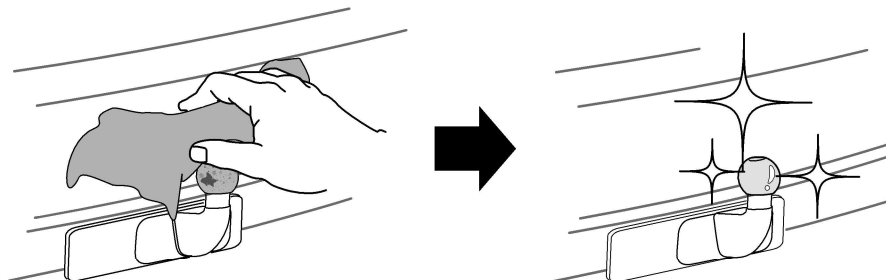

PARTS LIST

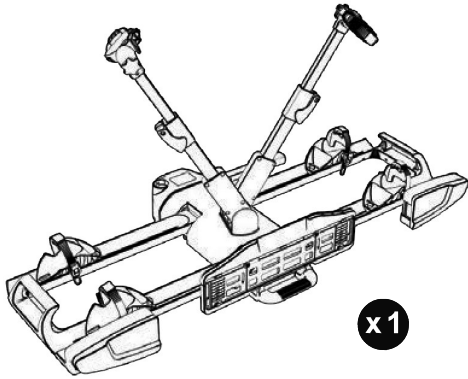

Max. weight per bike : 30 KG




Max. frame diameter : 110 mm



Max. wheel base : 1350 mm



Max. tire width : 80 mm






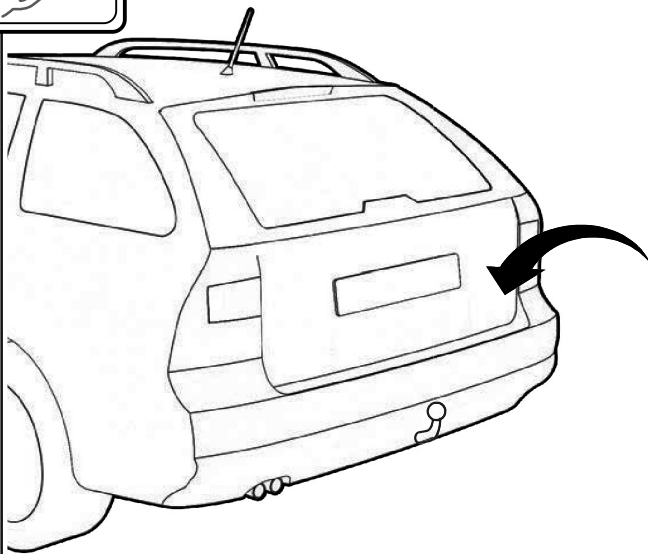


Compatible with 50mm towballs only.
Do not fit to 1 7/8 towballs or interchangeable/multi-ball* towballs as this could result in damage to the rack.




*Interchangeable/multi-ball systems allow the ball of the towball to be swapped for another size without removing the shank of the towball from the tongue of the towbar.



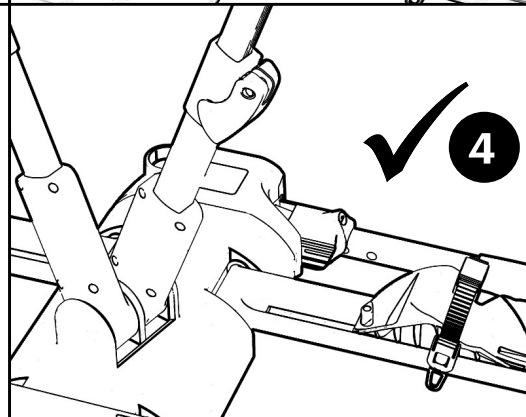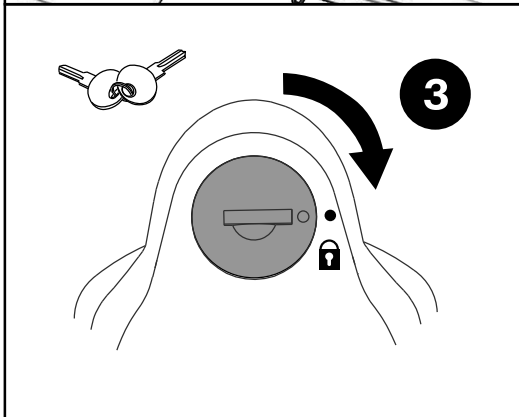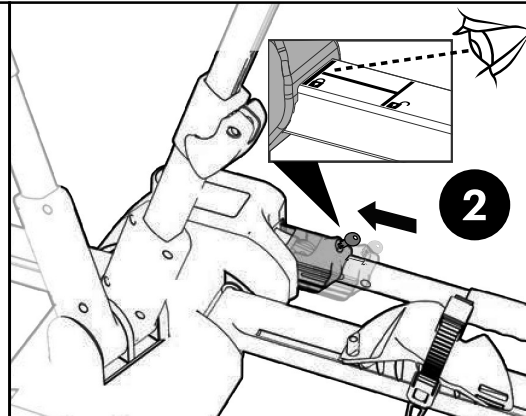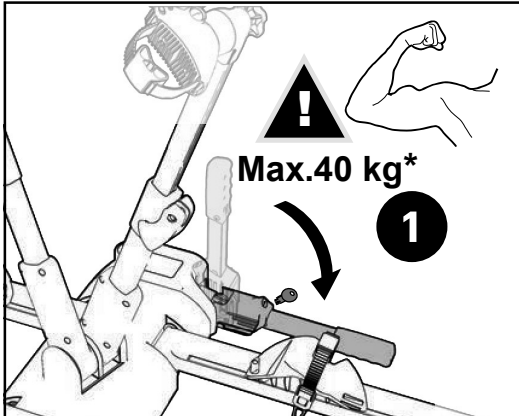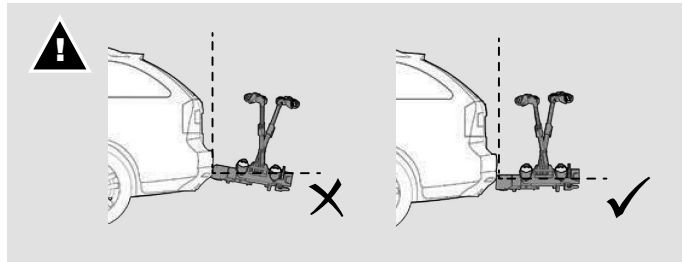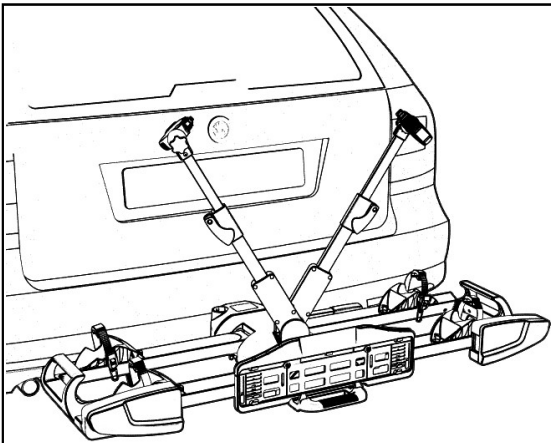


*If force on lever is too great or too small, please adjust clamping mechanism as follows:


If force on lever is < 40 kg

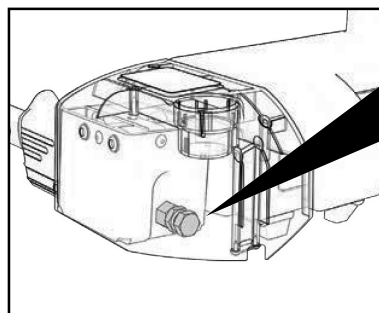


Screw is accesable underneath the rack

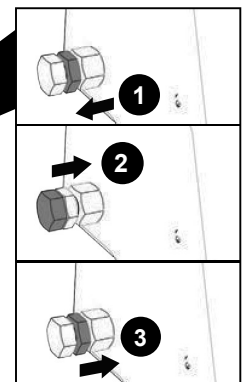


If force on lever is > 40 kg

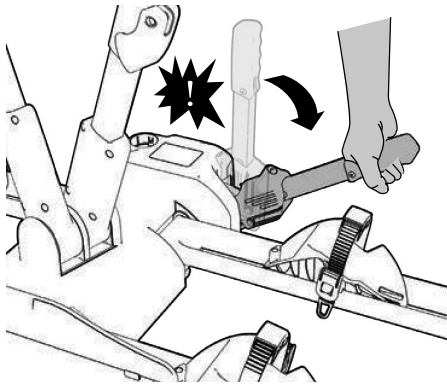




~~OK~~
→

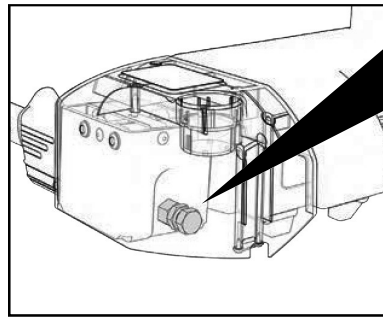


Screw is accesable underneath the rack

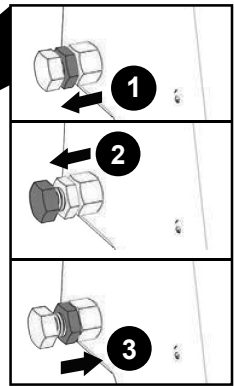




7-pin 12V

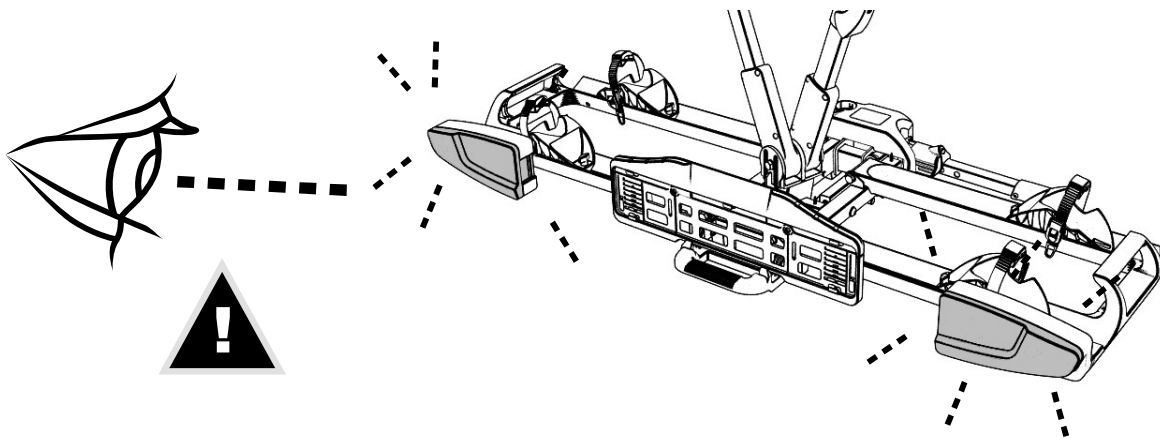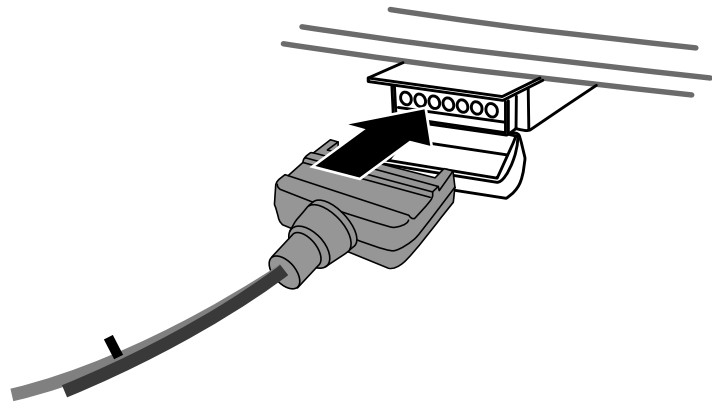


NOTE: This rack is equipped with LED lights. Some vehicles may experience a “bulb out” error due to the lower power draw of the LED system.

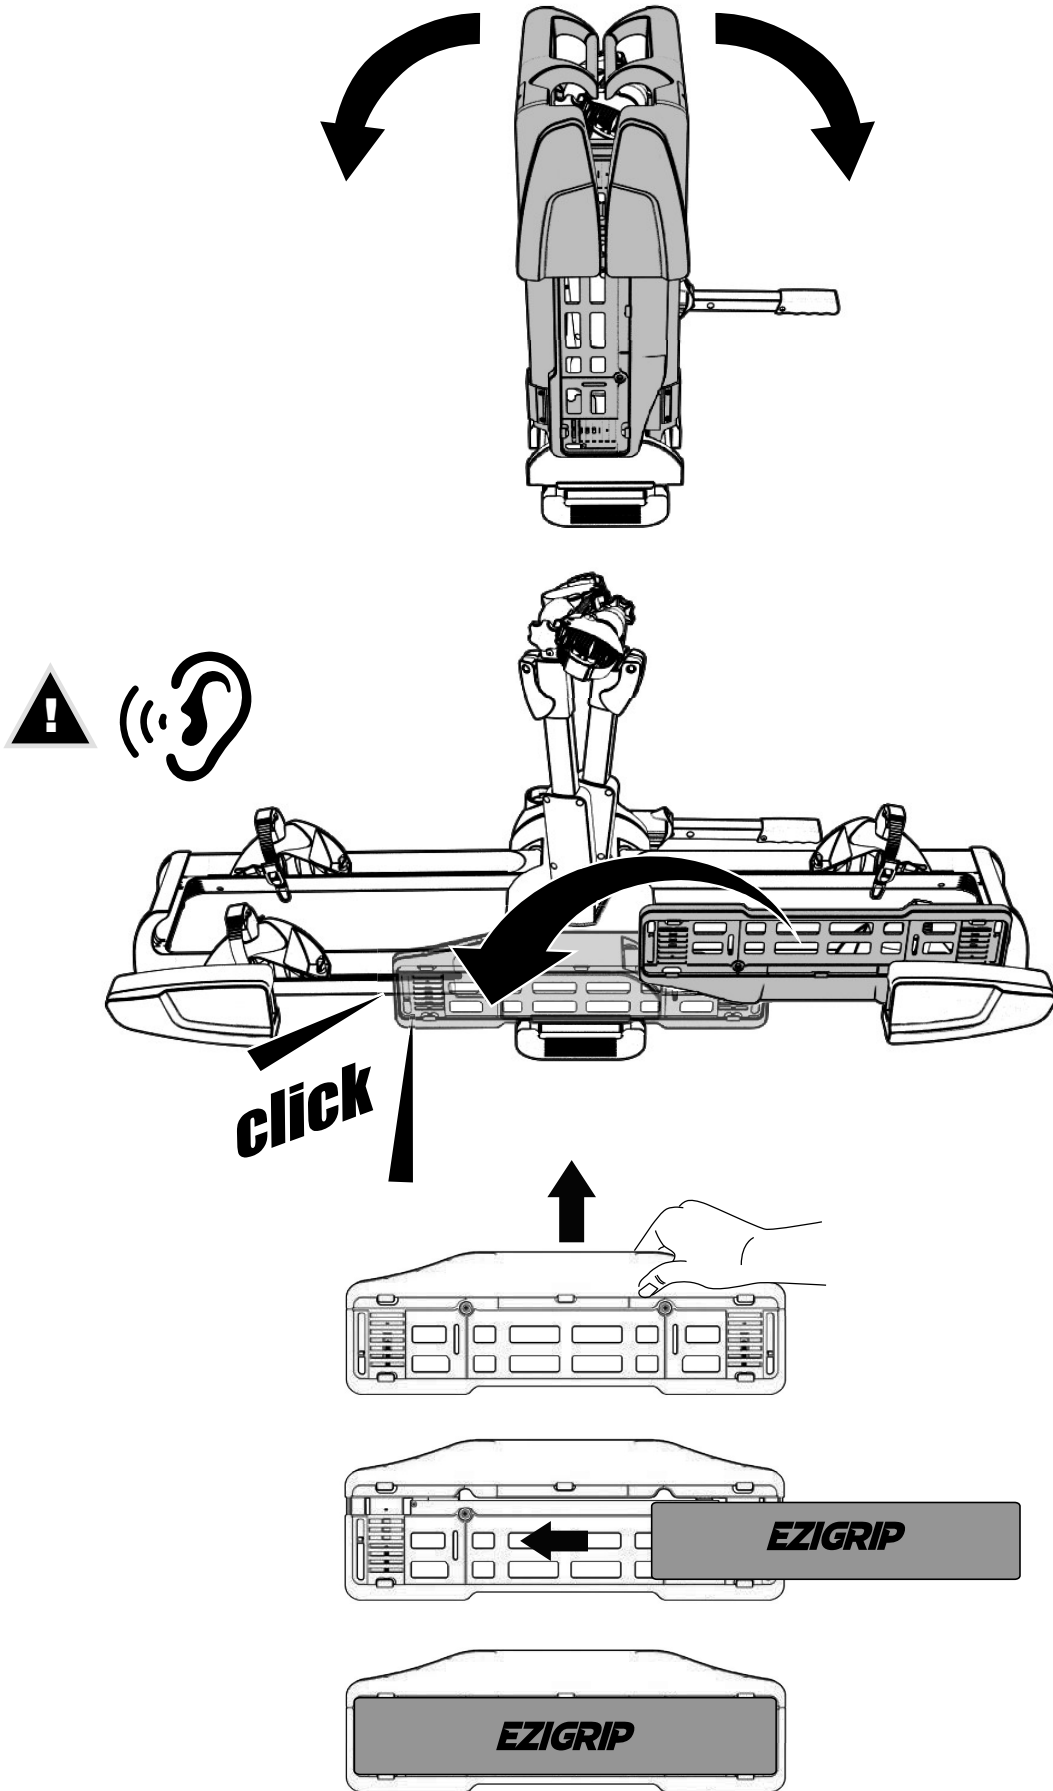



NOTE: Ezigrp license plate not included. Supplementary license plate must be sourced by you.

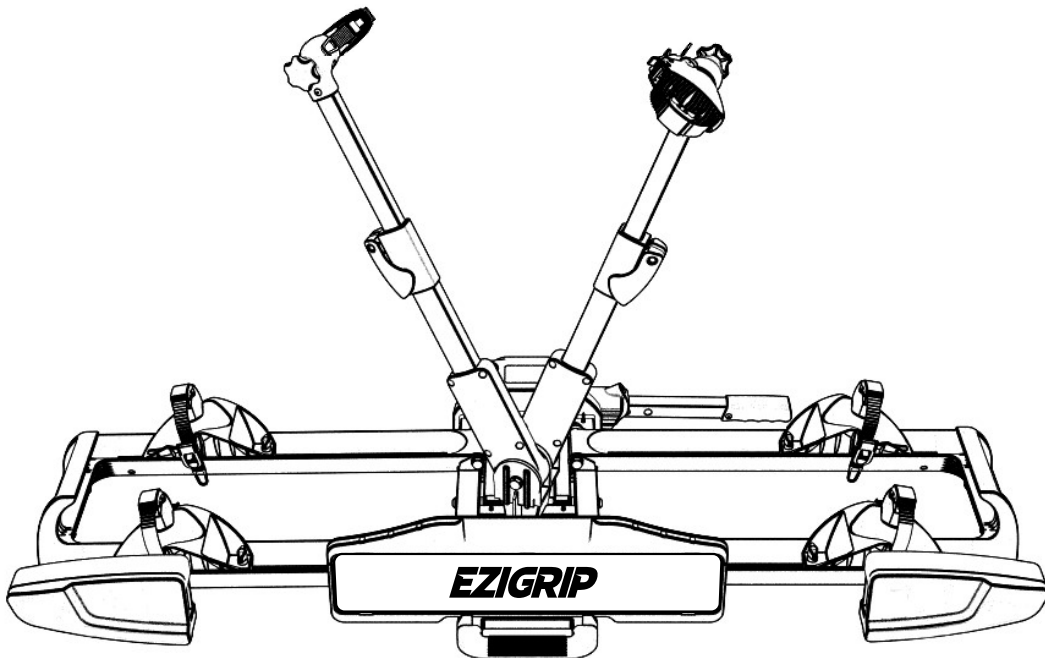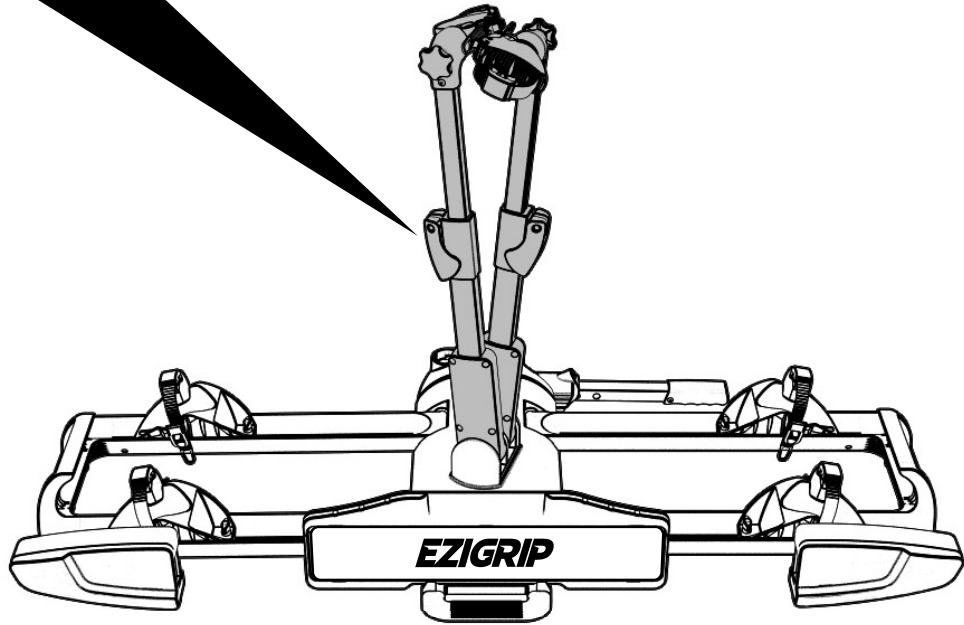
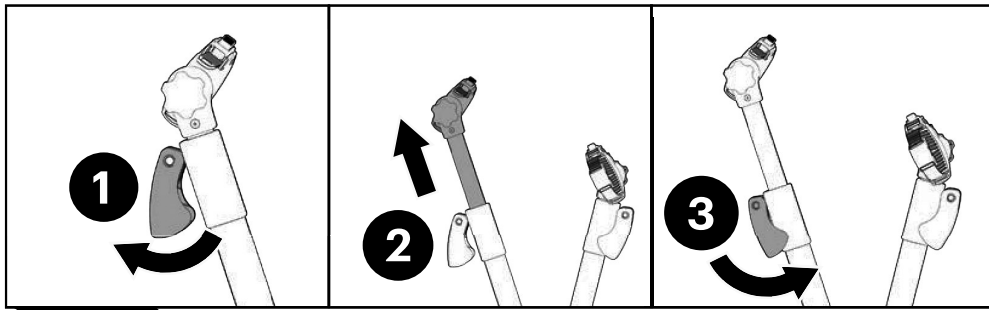


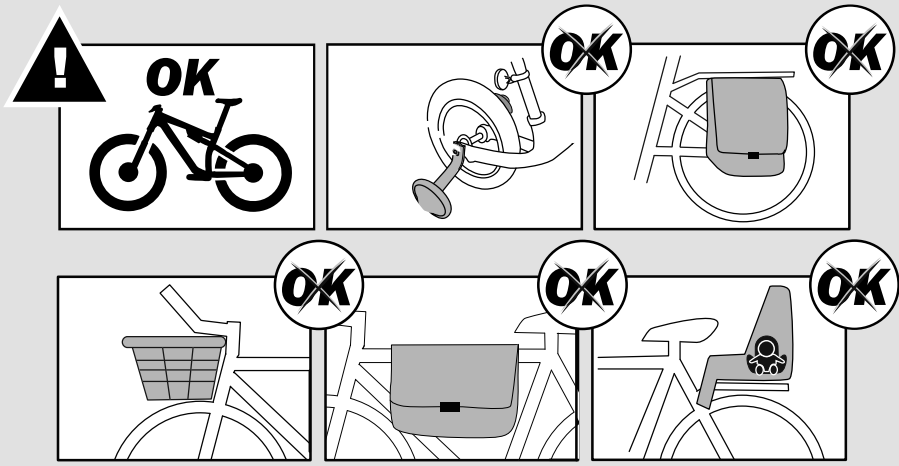


! E-BIKES




For ebike owners, please refer to ebike manufacturer's safety guide for proper handling and/or storing of bicycle batteries while using this rack. It is recommended to remove any detachable batteries.

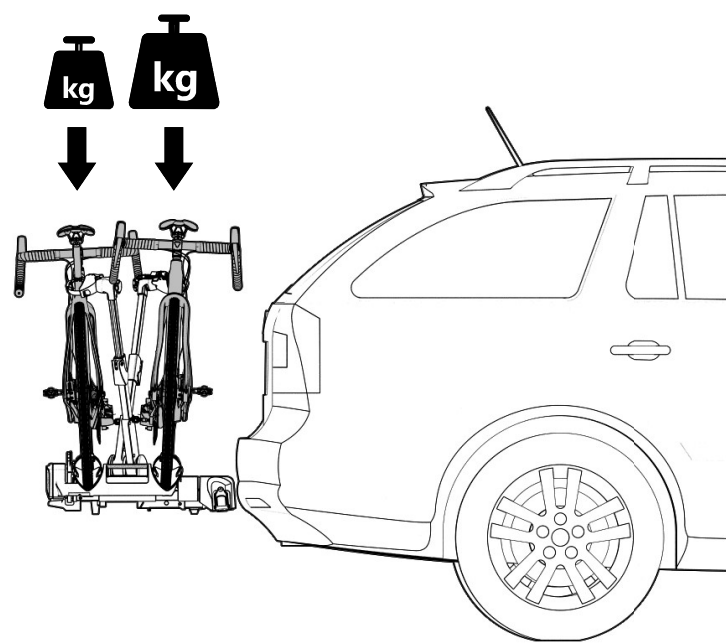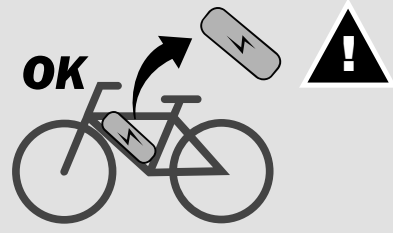

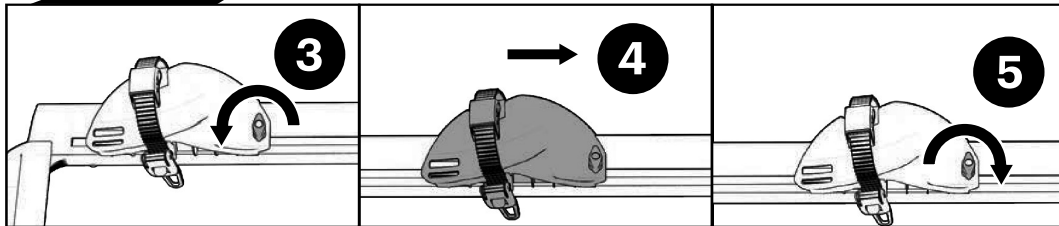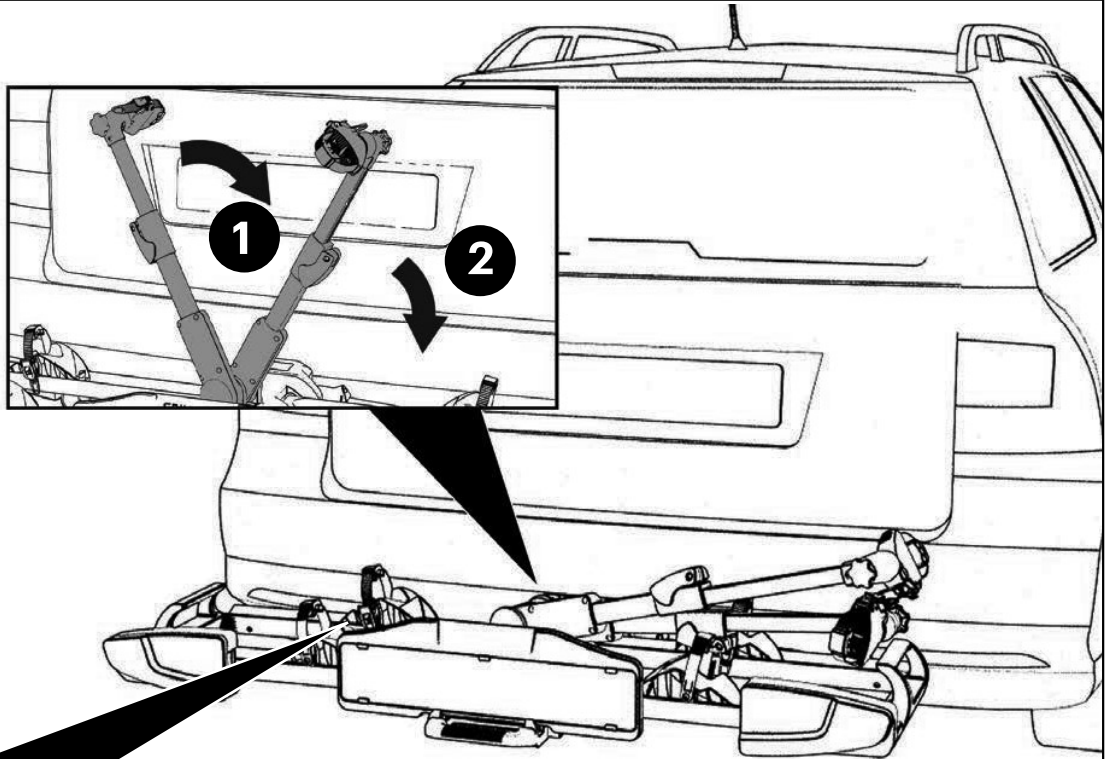


Repeat on right hand side.



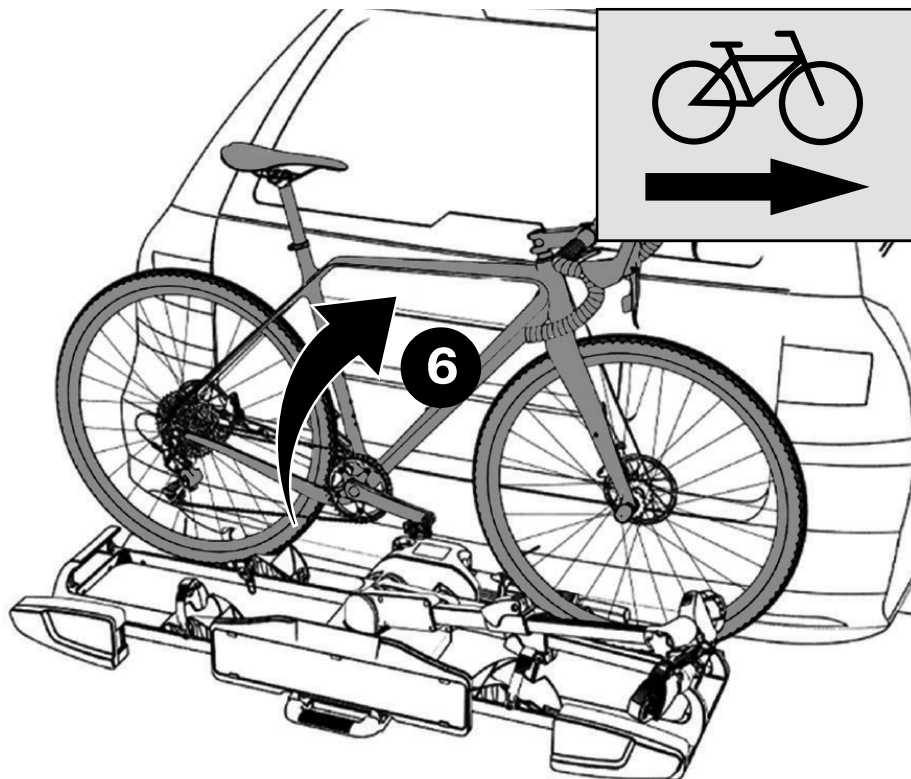


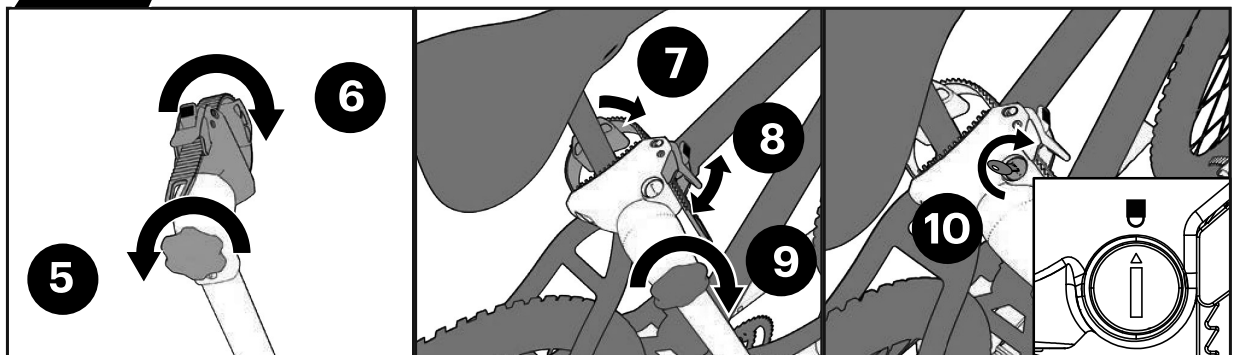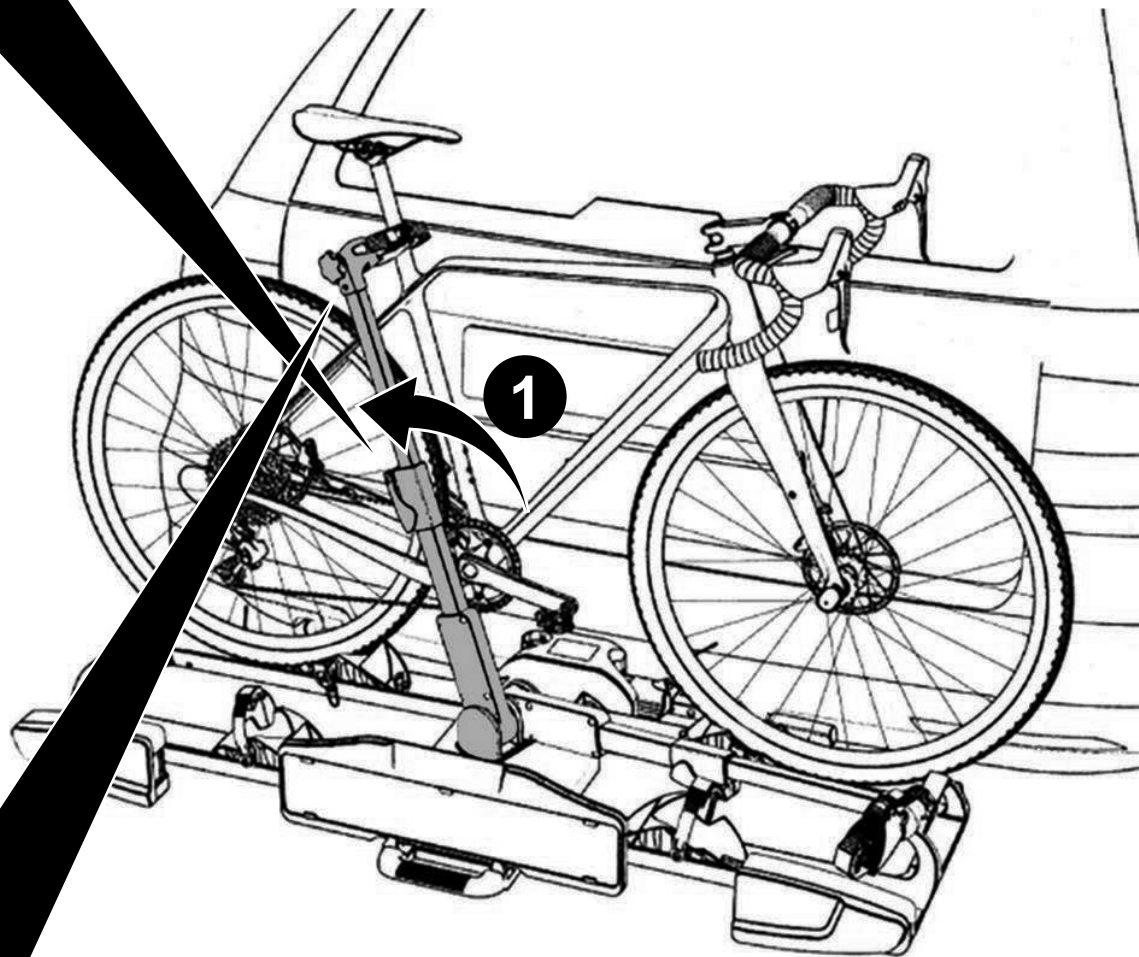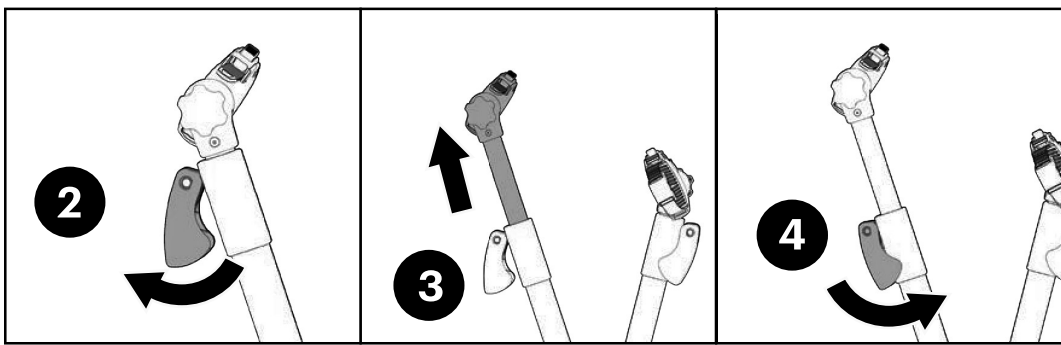

Note: we recommend clamping to the seat tube where possible. Ideally the frame holder will be positioned as high on the bike as possible for maximum stability.

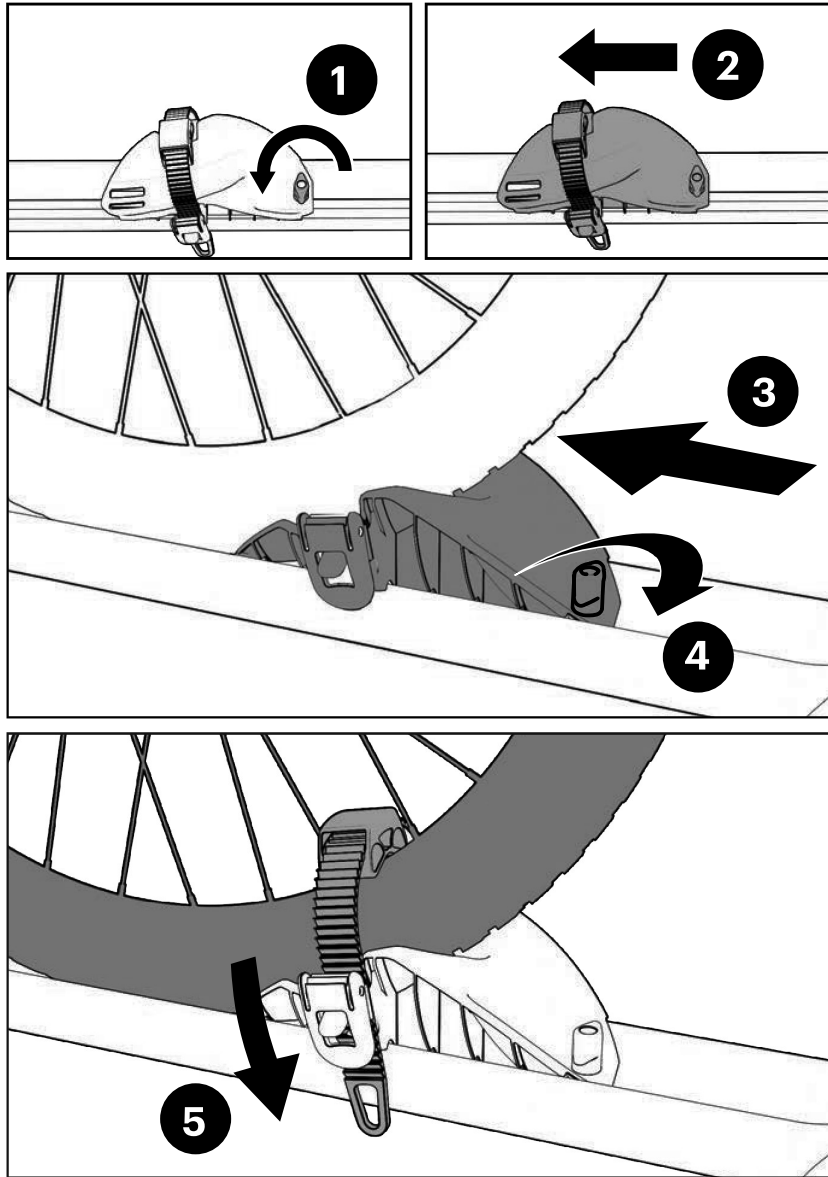


Repeat on other side.

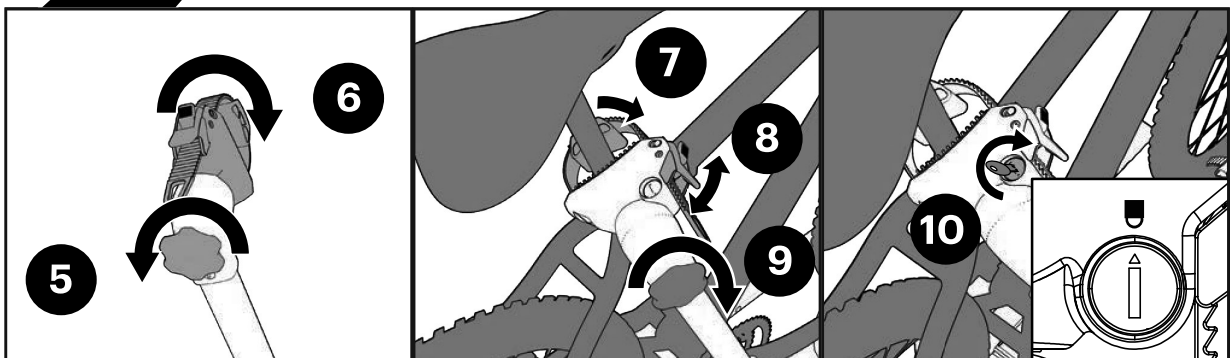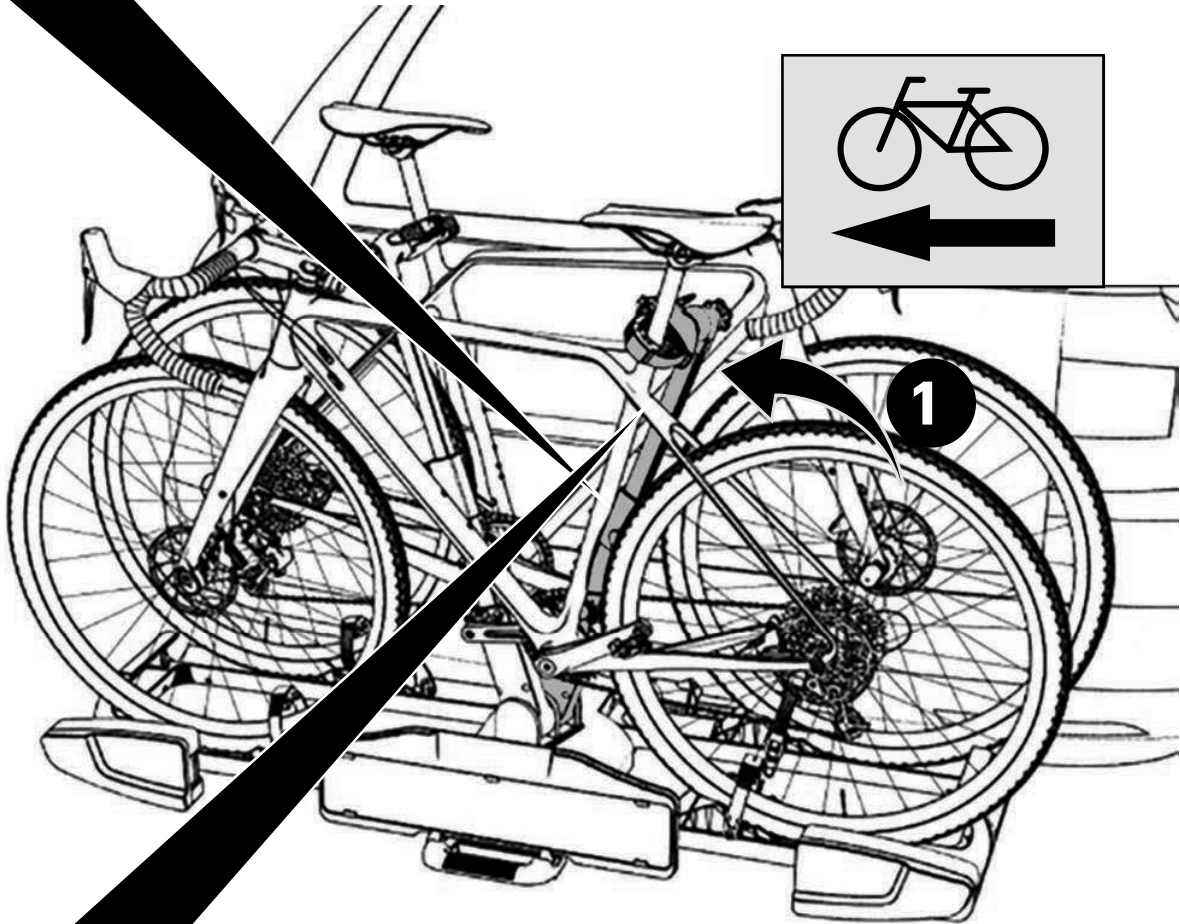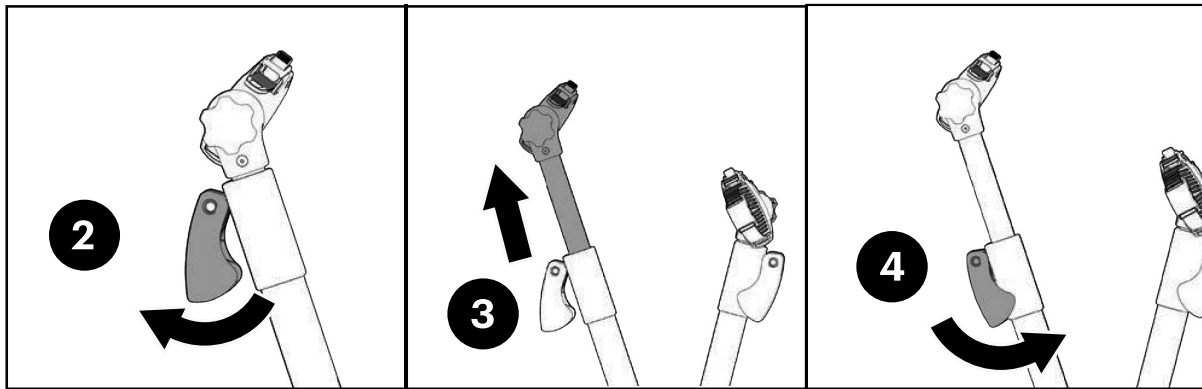



Note: we recommend clamping to the seat tube where possible. Ideally the frame holder will be positioned as high on the bike as possible for maximum stability.



Use safety strap when transporting bikes





x1


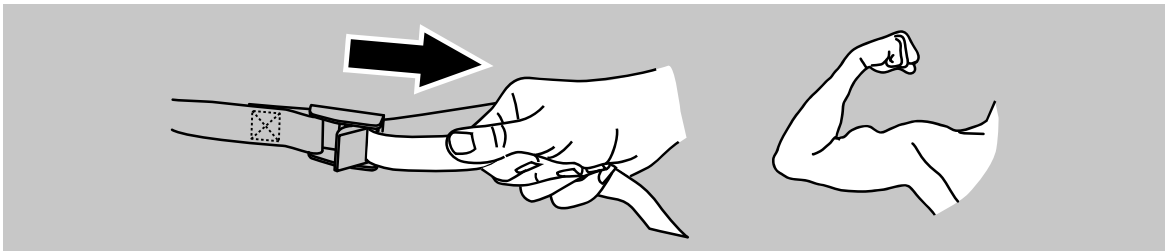
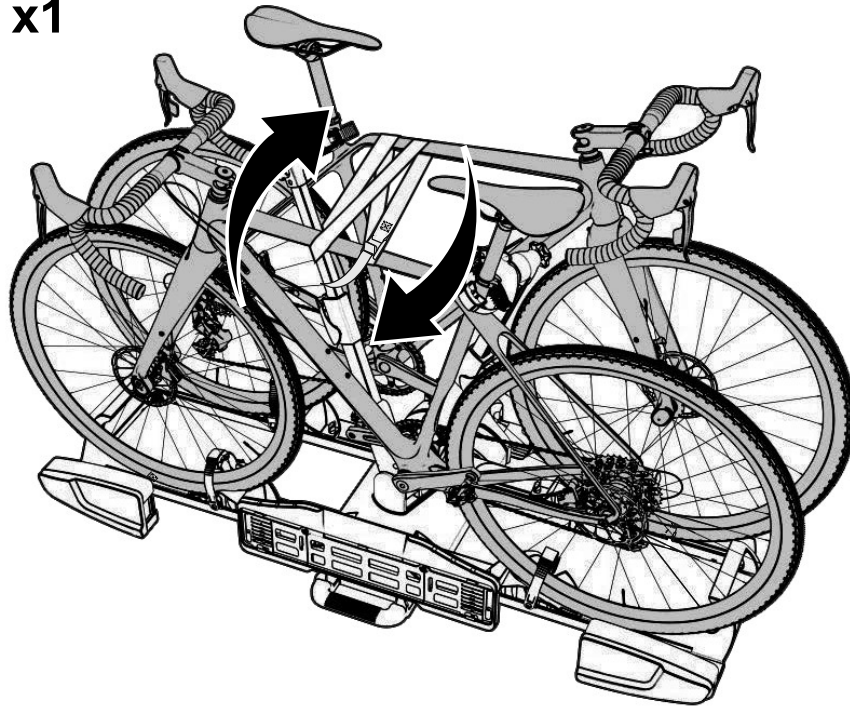





If there is excess movement of the front wheel of a bike, use the shorter straps provided to add additional restraint.










x2

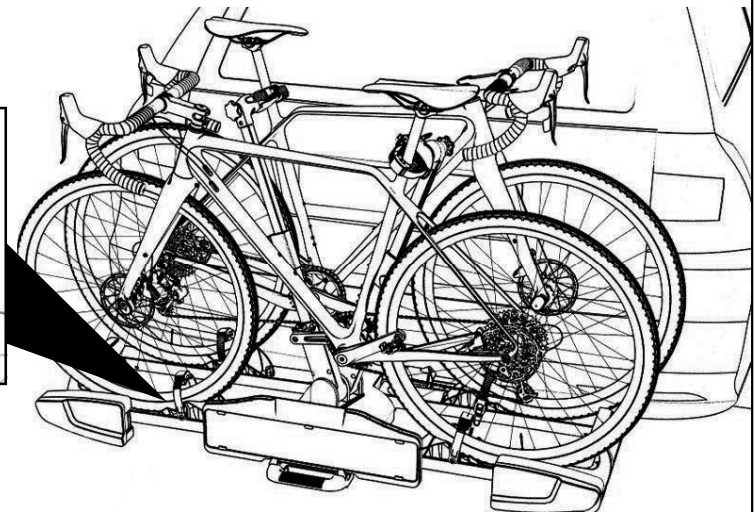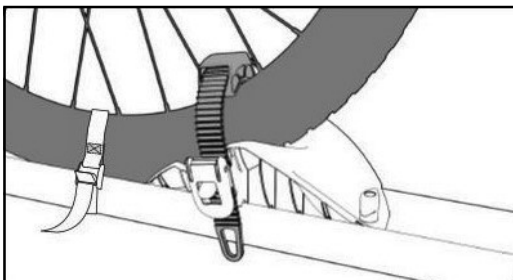

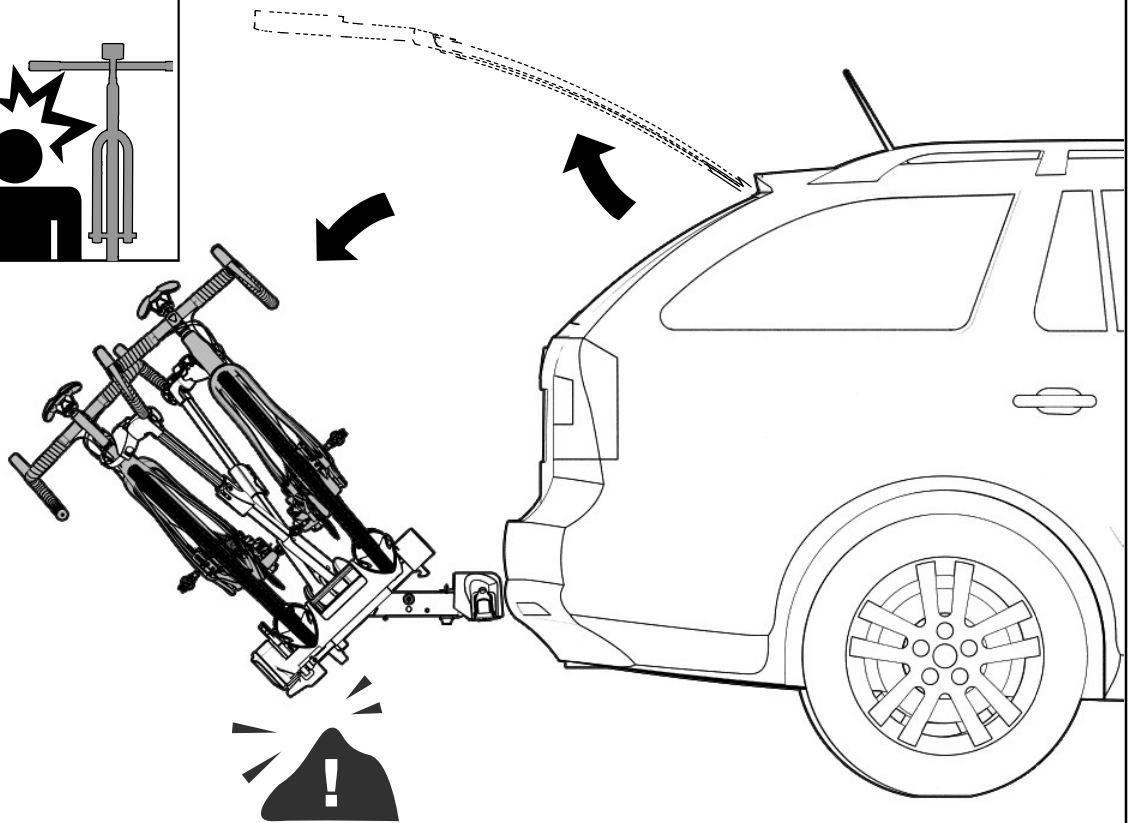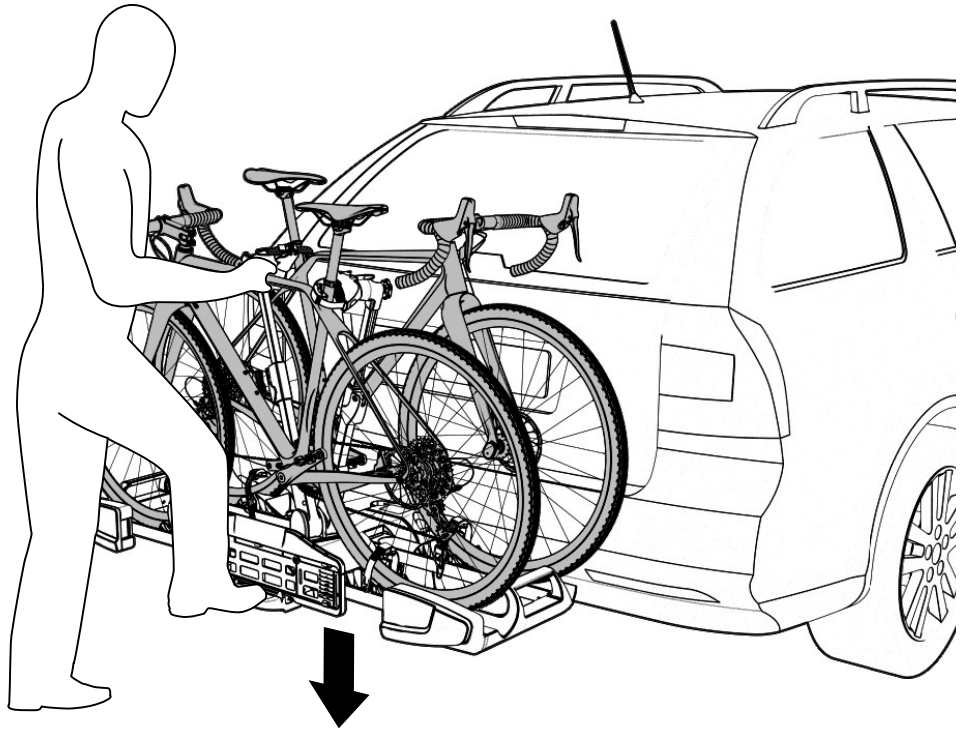

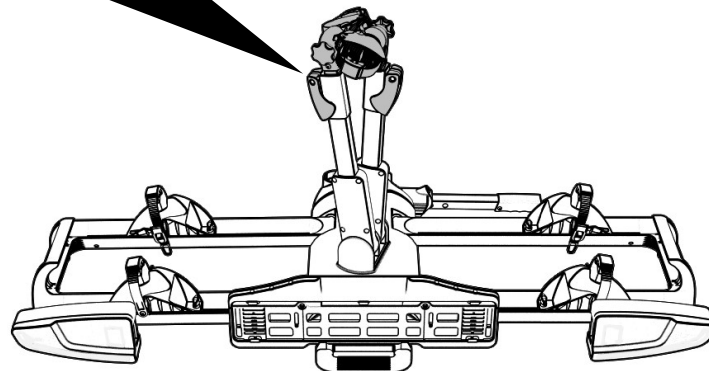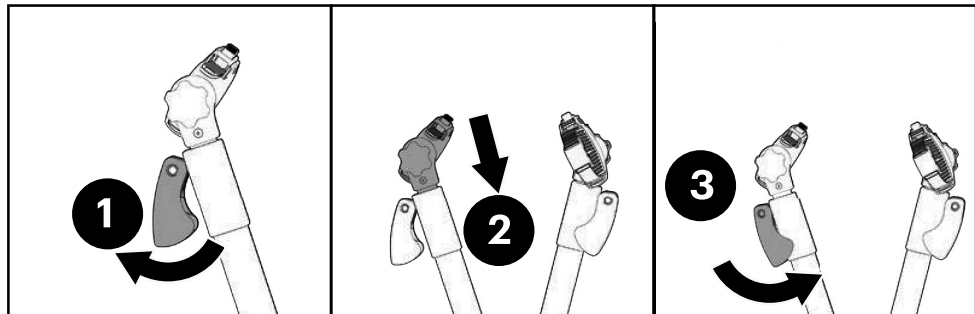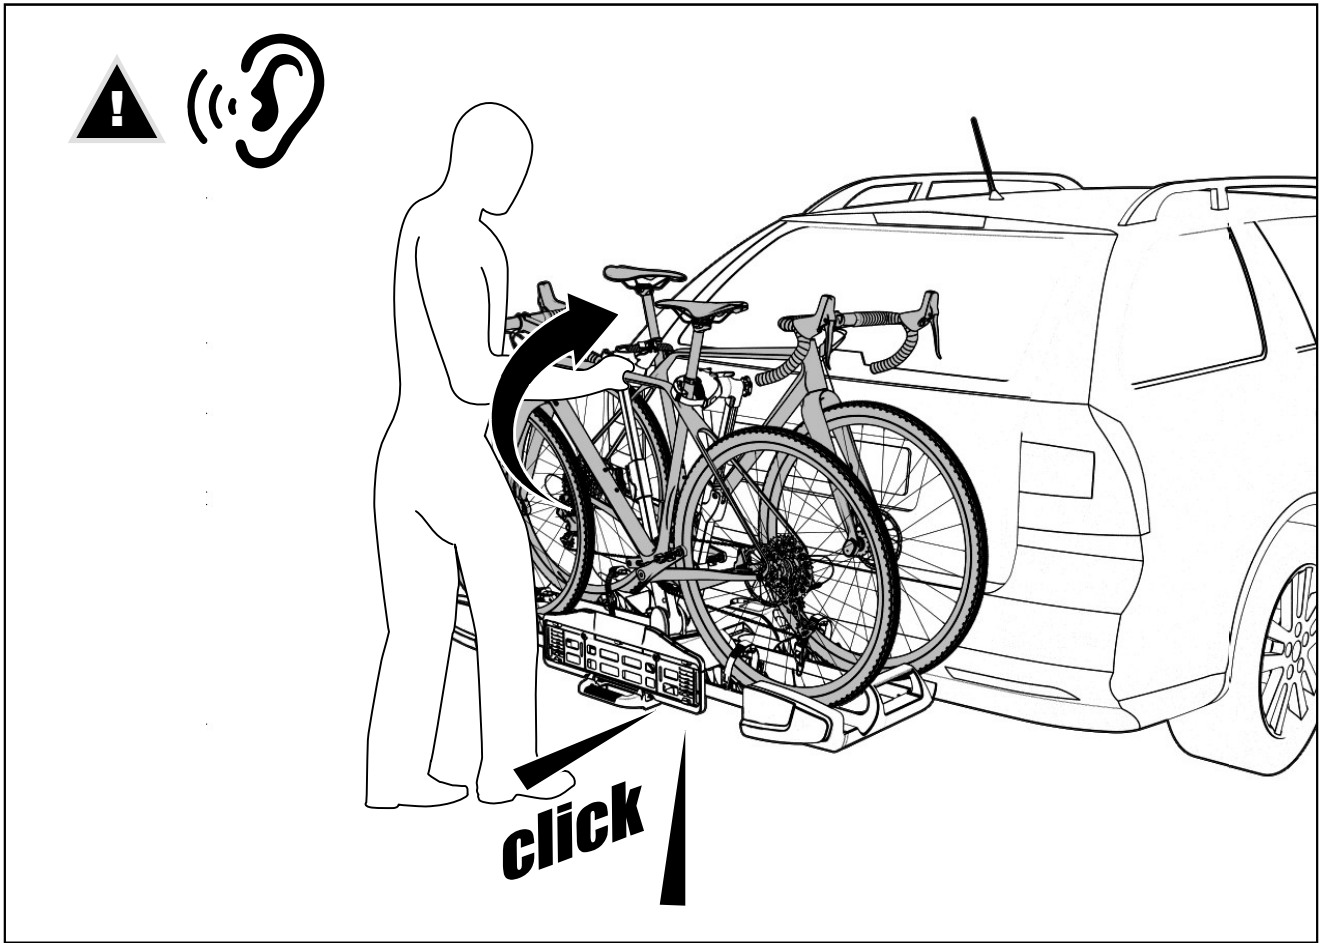

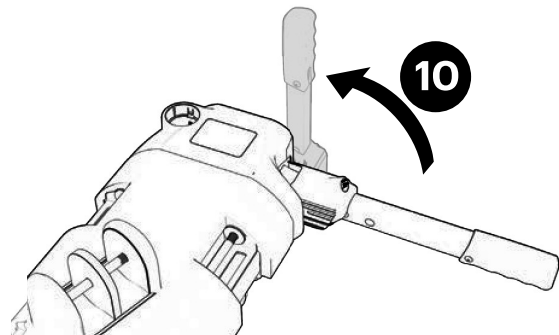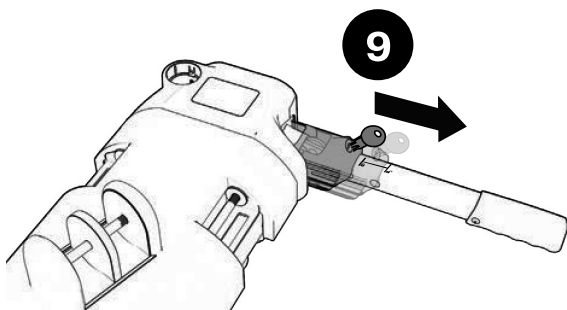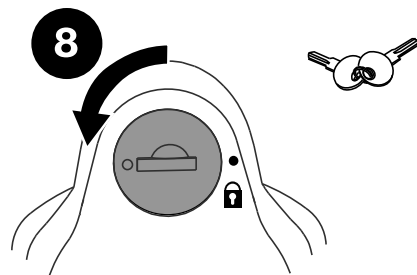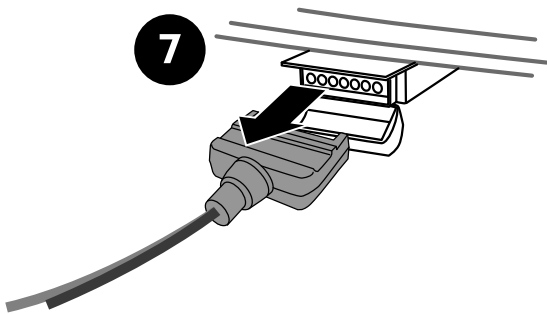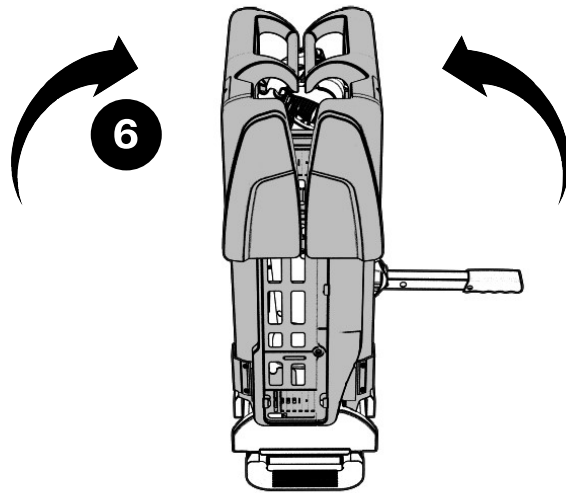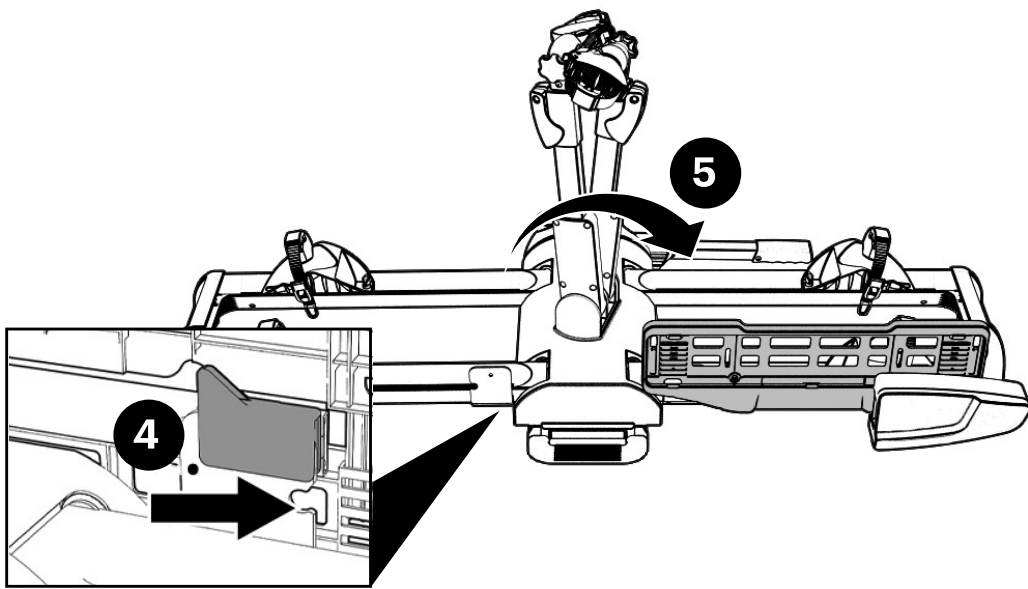

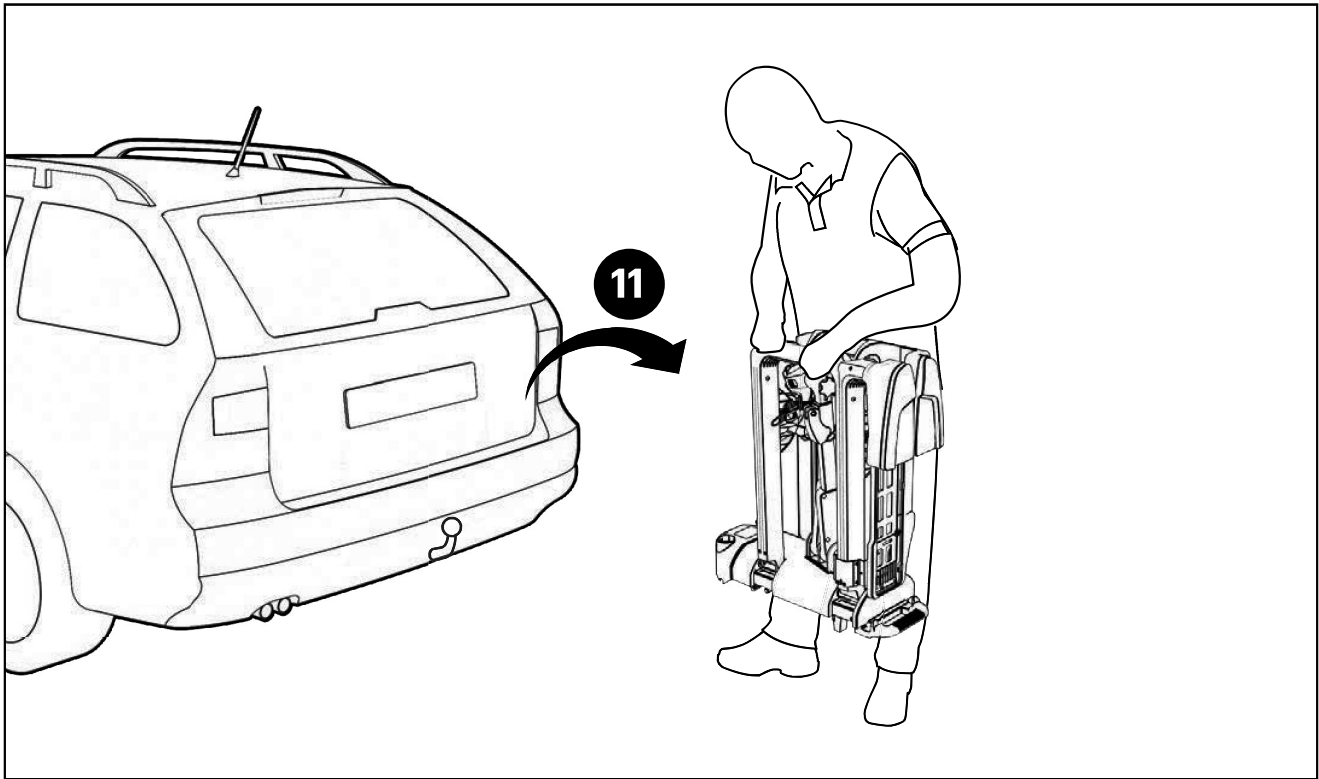

WARNINGS

GENERAL REMARKS

1. Please read and observe the instructions carefully before you use the product, and keep them in a safe place for future use. Check the parts list after opening the package. Make sure that all the parts are fully assembled according to the instruction before fitting it on your car.
2. You are responsible for installation of this product, and the manufacturer disclaims any liability due to improper fitting or use of the product.
3. Failure to properly install this bike carrier and/or the bikes may cause damage to the vehicle and/or the bikes, and may result in personal injury.
4. Do not use this product for purposes other than those for which it is designed. Do not modify any components of the product.
5. Remove the carrier if not in use.
6. Do not use the carrier to carry more bikes than recommended, or bikes heavier than specified.
7. Fits 50mm standard towballs. Always check the weight limitation of your towing system and never overload it.
8. Do not install the bike carrier on trailers, caravans, or motorhomes. Campervans (converted vans) are acceptable.
9. This bike carrier is not intended for transporting tandem, or recumbent bicycles.
10. Do not transport bicycles with attached baby seats, panniers, wheel covers, or full bike covers.
11. This product comes with a standard 3 year warranty, with an additional 2 years when registered online at www.ezigrip.com

SAFE AND PROPER USE

1. Please make sure you clean the surface of the towball completely before installing the rack.
2. Always use the safety strap to attach the bikes to the bike carrier.
3. Check if the distance from the exhaust pipe to the bicycle tires is safe for your bicycles or the straps of the carrier. The heat of the exhaust could damage the bike or bicycle carrier.
4. If your vehicle is equipped with an automatic tailgate opening system, disable this function when using the bike carrier, and open the tailgate manually.
5. When loading the bicycles, remove all loose parts and accessories from bicycles (toolbars, baby carriers, pumps, etc.)
6. Always position the biggest/heaviest bike first and closest to the car, and then position the smaller bike after that.
7. You are responsible for periodically verifying that all hardware, straps, knobs and/or hubs are securely tightened for safety purposes.
8. You might have to use extra protection to protect the bikes and the tailgate from scratches.
9. The locks used on this rack are theft deterrent.
10. Remove the battery whenever possible when you transport your e-bike on the carrier.

ROAD SAFETY

1. If the bikes and/or the carrier obstruct the vehicle's tail lights and license plate, you must use an additional signal board and supplementary plate. Supplementary plates are not included.
2. Check before departure that the light board of the carrier is properly functioning.
3. The bicycle rack increases the vehicle's length, and the bicycles may increase its width and height. Be aware of this when passing through narrow or low clearance spaces and when reversing. Any loads exceeding the indicated dimensions must nevertheless respect existing regulations and be properly strapped down.
4. The load of rack and bicycles will affect driving. Do not exceed the speed limit, and do not drive faster than 120 km/h (75 mph).
5. Drive slowly over speed bumps (10 km/h). Respect the speed limit, and adapt your speed to the condition of the road.
6. Off-road driving is not recommended and could result in damage to your vehicle, towbar/hitch receiver, bike carrier, or your bikes.
7. If you hit a bump or a hole in the road, stop your vehicle and inspect the bikes and the carrier. If you notice anything wrong, remove the bikes and do not use the bike carrier.
8. Make sure there is a safe distance between the bikes and the ground, especially when entering a driveway.

MAINTAINING YOUR BICYCLE RACK

1. Periodically inspect the product for signs of wear, corrosion, and fatigue.
2. Do not use the carrier with defective parts, contact the dealer to replace them before using it again.
3. Remove the product before entering an automatic car wash.
4. To keep your product in the best condition, it is recommended to remove the product from the car when not in use. Please be advised that this product is not designed to resist extreme weather conditions, especially seacoast air.
5. Lubricate the bolts in order to avoid corrosion. Periodically check tightness of bolts.
6. Store the carrier in a clean and dry state. Clean the rack with water, mild detergent and/or a soft cloth.

EZIGRIP